Receiver

Drain Tank Receiver

Storage for filtered residual liquids from Fuel Gas

APPLICATIONS:

- Liquid storage at site independently
- Packaged with 383D Duplex Skid system

DESIGN INFORMATION:

- Horizontal orientation
- Designed, constructed, and tested in accordance with ASME Section VIII, Division 1 ("U" Stamp available)
- Maximum Pressure rated: 100 PSI @ 150°F
- Fittings:
 - 2" NPT Inlets (option to be flanged)
 - 1" NPT Outlet drain
 - 2" NPT Inspection port w/ plug
 - 1/2" NPT Level Gage mounting ports

Tank vent

- Support: Saddle support with structural legs
- Material: Carbon Steel
- Painting:

Interior: Black Magna Coat


Rust prohibitive

Exterior: Red Oxide

OPTIONS:

For higher pressure rated availability, please consult with TM

Sales department

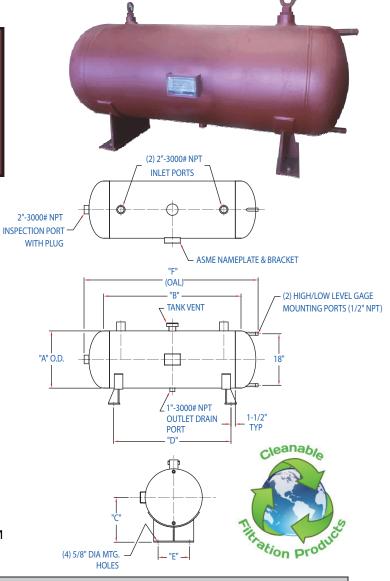

DRAIN TANK RECEIVERS FOR 383D SERIES DUPLEX FUEL GAS FILTERS							
MODEL	"A" (DIA)	"B"	"C"	"D"	"E"	"F" (OAL)	GAL
REC-200-30-8181	20" 508 mm	48" 1219.2 mm	15-5/8" 396.8 mm	41" 1041.4 mm	11" 279.4 mm	60-13/16" 1544.6 mm	60
REC-200-30-8182	20" 508 mm	64" 1625.6 mm	15-5/8" 396.8 mm	57" 1447.8 mm	11" 279.4 mm	76-13/16" 1951.0 mm	80
REC-240-30-8183	24" 609.6 mm	56" 1422.4 mm	17-5/8" 447.6 mm	49" 1244.6 mm	15" 381 mm	71-3/4" 1822.4 mm	100
REC-240-30-8184	24" 609.6 mm	79" 2006.6 mm	17-5/8" 447.6 mm	72" 1828.8 mm	15" 371 mm	94-3/4" 2406.6 mm	150
REC-300-30-8185	30" 762 mm	70" 1778 mm	20-5/8" 523.8 mm	63" 1600.2 mm	20" 508 mm	88-1/4" 2241.5 mm	200

Notes: Body material, connections, available options, and dimensions are completely customizable. Dimensions and options availability are subject to change without notice. Please consult the TM Sales Department or your local sales representative for certified drawings, or additional information.