

Accessories & Spare Parts for OV & OW

A RANGE OF OPTIONAL EXTRAS ENABLES FILTERS TO BE TAILORED TO CUSTOMERS' PRECISE REQUIREMENTS

Differential Pressure Indicator (D.P.I.)

As filter baskets become clogged with debris, the pressure drop increases. In order to maintain efficient filtration and line pressure it is important that baskets are cleaned regularly.

The Differential Pressure Indicator is designed to monitor basket conditions and provide visual warning that cleaning is required.

Available as an optional extra on all single, dual and self cleaning filters, the indicator is mounted directly on to the filter body and indicates the differential pressure across each basket.



MAIN FEATURES

- Easy to read
- Compact Design
- No pipework to become clogged
- Positive seal separates clean and dirty liquids
- Remote operation via electrical signal available if required
- Purpose designed for Airpel Series basket filter ranges

SPECIFICATION

- Anodised aluminium casing and nitrile diaphragm for water and oil applications
- Stainless steel casing, stainless steel internals and viton diaphragm for other liquids
- Indicator preset at 10 psi. Other spring ratings available on request
- Pointer operated by internal magnet avoiding leakage through seals

Airpel Series


OPTIONAL EXTRAS WITH FILTERS

Heating Jacket

For constant temperature processes to aid flow of viscous liquids.

100% Shut Off On Dual Filter Change Over

This can be achieved by use of a special seal within the change over cock mechanism and eliminates leakage between chambers during cleaning.

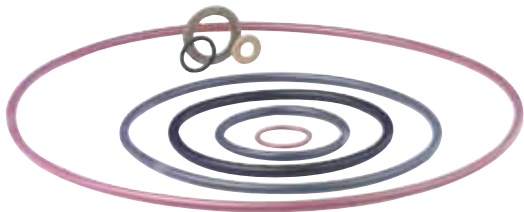

Automatic Air Eliminators

To vent air from filter e.g. after element cleaning.

Magnetic Inserts

Suspended from the cover to capture metallic particles. Magnets can be nylon coated if required.

Pressure Equalising Valves (Dual Filter Only)

Are fitted to sizes 100, 125, 150 and 200mm as standard but can be fitted to other sizes on request.

Alternative O-Ring Materials

To suit chemical or low/high temperature applications

Custom-designed Elements & Baskets

Made according to process needs



SPX

SPX Flow Technology

Hambridge Road, Newbury, Berkshire, RG14 5TR, UNITED KINGDOM
T: +44 (0) 1635 263915 F: +44 (0) 1635 36006 E: airpel@spx.com

For more information about our worldwide locations, approvals, certifications, and local representatives, please visit www.spx.com and www.airpelfilters.com.

SPX Corporation reserves the right to incorporate our latest design and material changes without notice or obligation. Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing.

ISSUED 05/2012 A160-EN

COPYRIGHT © 2012 SPX Corporation